


Printing date 15.11.2022

Version number 1

Revision: 15.11.2022

Page 1/10

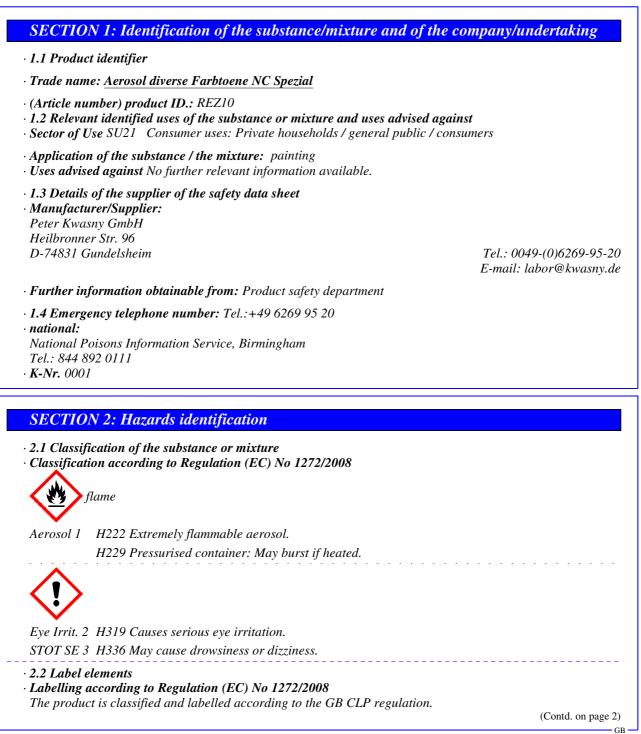

Revision: 15.11.2022

Printing date 15.11.2022 Version number 1 Trade name: Aerosol diverse Farbtoene NC Spezial (Contd. of page 1) · Hazard pictograms GHS07 GHS02 · Signal word Danger · Hazard-determining components of labelling: acetone n-butyl acetate · Hazard statements H222 Extremely flammable aerosol. H229 Pressurised container: May burst if heated. H319 Causes serious eye irritation. H336 May cause drowsiness or dizziness. · Precautionary statements P101 If medical advice is needed, have product container or label at hand. P102 Keep out of reach of children. P103 Read carefully and follow all instructions. P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. P211 Do not spray on an open flame or other ignition source. P251 Do not pierce or burn, even after use. Use only outdoors or in a well-ventilated area. P271 P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a POISON CENTER/doctor if you feel unwell. P312 *P337+P313* If eye irritation persists: Get medical advice/attention. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. *P410+P412* Dispose of contents/container in accordance with local/regional/national/international P501 regulations. • Additional information: Without adequate ventilation, explosive atmosphere/gas mix may be created. Warning! Hazardous respirable droplets may be formed when sprayed. Do not breathe spray or mist. · 2.3 Other hazards · Results of PBT and vPvB assessment · **PBT:** Not applicable. · vPvB: Not applicable. **SECTION 3: Composition/information on ingredients** 

· 3.2 Mixtures

· Description: Mixture of substances listed below with nonhazardous additions.

· Dangerous components:		
	acetone	25-<50%
	propane Ø Flam. Gas 1A, H220; Press. Gas (Comp.), H280, EUH018	10-<25%
	butane (containing ≤ 0,1 % butadiene (203-450-8))	5-<10%

Printing date 15.11.2022

Version number 1

Revision: 15.11.2022

Trade name: Aerosol diverse Farbtoene NC Spezial

CAS: 9004-70-0	nitrocellulose with water(not less than 25% water, by mass)	5-<10%
Reg.nr.: no Reach No. availlable	🔗 Expl. 1.1, H201	
CAS: 123-86-4	n-butyl acetate	2.5-<5%
EINECS: 204-658-1 Reg.nr.: 01-2119485493-29-xxxx	🚸 Flam. Liq. 3, H226; 🚸 STOT SE 3, H336, EUH066	
CAS: 108-65-6	2-methoxy-1-methylethyl acetate	2.5-<5%
EINECS: 203-603-9 Reg.nr.: 01-2119475791-29-xxxx	🚸 Flam. Liq. 3, H226	
CAS: 75-28-5	isobutane (containing $\leq 0,1$ % butadiene (203-450-8))	2.5-<5%
EINECS: 200-857-2 Reg.nr.: 01-2119485395-27-xxxx	🚸 Flam. Gas 1A, H220; Press. Gas (Comp.), H280, EUH018	
CAS: 64-17-5	ethanol	2.5-<5%
EINECS: 200-578-6 Reg.nr.: 01-2119457610-43-xxxx	🚸 Flam. Liq. 2, H225; 🚸 Eye Irrit. 2, H319	
CAS: 1330-20-7	xylene, mixture of isomers	1-<2.5%
EINECS: 215-535-7	🚸 Flam. Liq. 3, H226; 🚸 STOT RE 2, H373; Asp. Tox. 1,	
Reg.nr.: 01-2119488216-32-xxxx	H304; 🚯 Acute Tox. 4, H312; Acute Tox. 4, H332; Skin Irrit. 2, H315; Eye Irrit. 2, H319; STOT SE 3, H335	
CAS: 7397-62-8	butyl glycollate	<1%
EINECS: 230-991-7 Reg.nr.: 01-2119514685-36-xxxx	🚸 Repr. 2, H361; 🔶 Eye Dam. 1, H318	

### **SECTION 4: First aid measures**

• 4.1 Description of first aid measures

- After inhalation: Supply fresh air; consult doctor in case of complaints.
- After skin contact: Generally the product does not irritate the skin.
- After eye contact:

Rinse opened eye for several minutes under running water. If symptoms persist, consult a doctor.

- After swallowing: If symptoms persist consult doctor.
- 4.2 Most important symptoms and effects, both acute and delayed No further relevant information available.
- 4.3 Indication of any immediate medical attention and special treatment needed

No further relevant information available.

### **SECTION 5: Firefighting measures**

- · 5.1 Extinguishing media -
- · Suitable extinguishing agents: Cool container whit water
- 5.2 Special hazards arising from the substance or mixture No further relevant information available.
- · 5.3 Advice for firefighters
- · Protective equipment: No special measures required.

### **SECTION 6: Accidental release measures**

- 6.1 Personal precautions, protective equipment and emergency procedures Wear protective equipment. Keep unprotected persons away.
- · 6.2 Environmental precautions: Do not allow to enter sewers/ surface or ground water.
- $\cdot$  6.3 Methods and material for containment and cleaning up:
- Dispose contaminated material as waste according to item 13. Ensure adequate ventilation.

(Contd. on page 4)

GB

Printing date 15.11.2022

Version number 1

Revision: 15.11.2022

Trade name: Aerosol diverse Farbtoene NC Spezial

(Contd. of page 3)

• 6.4 Reference to other sections
See Section 7 for information on safe handling.
See Section 8 for information on personal protection equipment.
See Section 13 for disposal information.

## **SECTION 7: Handling and storage**

### · 7.1 Precautions for safe handling

Keep away from heat and direct sunlight. Ensure good ventilation/exhaustion at the workplace.

### · Information about fire - and explosion protection:

Do not spray onto a naked flame or any incandescent material.

Keep ignition sources away - Do not smoke.

*Pressurised container: protect from sunlight and do not expose to temperatures exceeding 50°C, i.e. electric lights. Do not pierce or burn, even after use.* 

· 7.2 Conditions for safe storage, including any incompatibilities

· Storage:

- Requirements to be met by storerooms and receptacles:
- Observe official regulations on storing packagings with pressurised containers.
- · Information about storage in one common storage facility: Not required.
- · Further information about storage conditions: None.
- 7.3 Specific end use(s) No further relevant information available.

### **SECTION 8: Exposure controls/personal protection**

· 8.1 Control parameters

· Ingredients with limit values that require monitoring at the workplace:

#### 67-64-1 acetone

WEL Short-term value: 3620 mg/m<sup>3</sup>, 1500 ppm Long-term value: 1210 mg/m<sup>3</sup>, 500 ppm

106-97-8 butane (containing ≤0,1 % butadiene (203-450-8))

WEL Short-term value: 1810 mg/m<sup>3</sup>, 750 ppm Long-term value: 1450 mg/m<sup>3</sup>, 600 ppm Carc (if more than 0.1% of buta-1.3-diene)

123-86-4 n-butyl acetate

WEL Short-term value: 966 mg/m<sup>3</sup>, 200 ppm Long-term value: 724 mg/m<sup>3</sup>, 150 ppm

#### 108-65-6 2-methoxy-1-methylethyl acetate

WEL Short-term value: 548 mg/m<sup>3</sup>, 100 ppm Long-term value: 274 mg/m<sup>3</sup>, 50 ppm Sk

64-17-5 ethanol

WEL Long-term value: 1920 mg/m<sup>3</sup>, 1000 ppm

1330-20-7 xylene, mixture of isomers

WEL Short-term value: 441 mg/m<sup>3</sup>, 100 ppm Long-term value: 220 mg/m<sup>3</sup>, 50 ppm

Sk; BMGV

(Contd. on page 5)

GB -

Revision: 15.11.2022

## Version number 1 Printing date 15.11.2022 Trade name: Aerosol diverse Farbtoene NC Spezial (Contd. of page 4) · Ingredients with biological limit values: 1330-20-7 xylene, mixture of isomers BMGV 650 mmol/mol creatinine Medium: urine Sampling time: post shift Parameter: methyl hippuric acid · Additional information: The lists valid during the making were used as basis. · 8.2 Exposure controls · Appropriate engineering controls No further data; see item 7. · Individual protection measures, such as personal protective equipment · General protective and hygienic measures: Keep away from foodstuffs, beverages and feed. Immediately remove all soiled and contaminated clothing Wash hands before breaks and at the end of work. Avoid contact with the eyes. Avoid contact with the eyes and skin. · Respiratory protection: When workers are facing concentrations above the exposure limit they must use appropriate certified respirators. Half mask with combination filter, class A1P2 minimum, or breathing mask with outer air supply. · Hand protection

Protective gloves



The glove material has to be impermeable and resistant to the product/ the substance/ the preparation.

Selection of the glove material on consideration of the penetration times, rates of diffusion and the degradation

- · Material of gloves Nitrile rubber, NBR
- · Penetration time of glove material
- Gloves must be changed after every contamination.

The exact break trough time has to be found out by the manufacturer of the protective gloves and has to be observed.

For the permanent contact of a maximum of 15 minutes gloves made of the following materials are suitable:

butyl rubber, 0,7mm

· Eye/face protection Safety glasses



Tightly sealed goggles

## **SECTION 9: Physical and chemical properties**

- · 9.1 Information on basic physical and chemical properties
- · General Information
- · Physical state
- · Colour: · Odour:

Aerosol According to product specification *Characteristic* 

(Contd. on page 6)

Printing date 15.11.2022

Version number 1

Revision: 15.11.2022

## Trade name: Aerosol diverse Farbtoene NC Spezial

	(Contd. of page 3
Odour threshold:	Not determined.
Melting point/freezing point:	Undetermined.
Boiling point or initial boiling point and boiling	
range	-44.5 °C
Flammability	Not applicable.
Lower and upper explosion limit	
Lower:	1.7 Vol % (74-98-6 propane)
Upper:	13 Vol % (67-64-1 acetone)
Flash point:	<0 °C
Ignition temperature:	$365 \ ^{\circ}C (106-97-8 \text{ butane (containing } \le 0,1 \ \% \text{ butadient})$
	(203-450-8)))
Decomposition temperature:	Not determined.
pH	Not determined.
Viscosity:	
Kinematic viscosity	Not determined.
Dynamic:	Not determined.
Solubility	
water:	Not miscible or difficult to mix.
Partition coefficient n-octanol/water (log value)	Not determined.
Vapour pressure at 20 °C:	3,600 hPa (74-98-6 propane)
Density and/or relative density	-,
Relative density	Not determined.
Vapour density	Not determined.
	Not determined.
9.2 Other information	
Appearance:	
Form:	Aerosol
Important information on protection of health an environment, and on safety. Auto-ignition temperature:	Product is not selfigniting.
Explosive properties:	Product is not explosive. However, formation of
Explosive properties.	explosive air/vapour mixtures are possible.
	Not determined.
C. L	Noi delerminea.
Solvent content:	0400
Organic solvents:	84.9 %
	With propellant gas. Content given by weight.
VOC (EU)	84.95 %
Solids content:	13.2 %
Change in condition	
Evaporation rate	Not applicable.
Information with regard to physical hazard classe	25
Explosives	Void
	Void
Flammable gases	
Aerosols	Extremely flammable aerosol. Pressurised container
	May burst if heated.
Oxidising gases	Void
Gases under pressure	Void
Flammable liquids	Void
	Void
Flammable solids	
	Void
Flammable solids Self-reactive substances and mixtures	Void Void
Flammable solids Self-reactive substances and mixtures Pyrophoric liquids	
Flammable solids Self-reactive substances and mixtures Pyrophoric liquids Pyrophoric solids	Void Void
Flammable solids Self-reactive substances and mixtures Pyrophoric liquids Pyrophoric solids Self-heating substances and mixtures	Void
Flammable solids Self-reactive substances and mixtures Pyrophoric liquids Pyrophoric solids	Void Void

GB

Printing date 15.11.2022

Version number 1

Revision: 15.11.2022

Trade name: Aerosol diverse Farbtoene NC Spezial

		(Contd. of page 6)
• Oxidising liquids	Void	
• Oxidising solids	Void	
Organic peroxides	Void	
• Corrosive to metals	Void	
Desensitised explosives	Void	

### **SECTION 10: Stability and reactivity**

· 10.1 Reactivity No further relevant information available.

· 10.2 Chemical stability

- Thermal decomposition / conditions to be avoided: No decomposition if used according to specifications.
- 10.3 Possibility of hazardous reactions No dangerous reactions known.
- 10.4 Conditions to avoid No further relevant information available.
- 10.5 Incompatible materials: No further relevant information available.
- 10.6 Hazardous decomposition products: No dangerous decomposition products known.

### **SECTION 11: Toxicological information**

- · 11.1 Information on hazard classes as defined in Regulation (EC) No 1272/2008
- Serious eye damage/irritation Causes serious eye irritation.
- · STOT-single exposure May cause drowsiness or dizziness.
- $\cdot$  11.2 Information on other hazards
- · Endocrine disrupting properties

541-02-6 2,2,4,4,6,6,8,8,10,10-decamethylcyclopentasiloxane

556-67-2 octamethylcyclotetrasiloxane

## **SECTION 12: Ecological information**

· 12.1 Toxicity

- Aquatic toxicity: No further relevant information available.
- 12.2 Persistence and degradability No further relevant information available.
- · 12.3 Bioaccumulative potential No further relevant information available.
- · 12.4 Mobility in soil No further relevant information available.
- · 12.5 Results of PBT and vPvB assessment
- · PBT: Not applicable.
- **vPvB:** Ikke relevant.
- 12.6 Endocrine disrupting properties For information on endocrine disrupting properties see section 11.
- · 12.7 Other adverse effects
- · Additional ecological information:
- · General notes: Water hazard class 1 (German Regulation) (Self-assessment): slightly hazardous for water

### **SECTION 13: Disposal considerations**

- · 13.1 Waste treatment methods
- Recommendation

Must not be disposed together with household garbage. Do not allow product to reach sewage system.

(Contd. on page 8)

List II

List II, III

Printing date 15.11.2022

Version number 1

Revision: 15.11.2022

(Contd. of page 7)

Trade name: Aerosol diverse Farbtoene NC Spezial

• Uncleaned packaging: • Recommendation: Disposal must be made according to official regulations.

14.1 UN number or ID number	
ADR, IMDG, IATA	UN1950
· 14.2 UN proper shipping name	
ADR	1950 AEROSOLS
·IMDG	AEROSOLS
· IATA	AEROSOLS, flammable
• 14.3 Transport hazard class(es)	
ADR	
- Class	2 5F Gases.
· Label	2.1 2.1
· IMDG, IATA	
· Class	2.1 Gases.
· Label	2.1
14.4 Packing group	
ADR, IMDG, IATA	Void
	not classified
14.5 Environmental hazards:	
Marine pollutant:	No
· 14.6 Special precautions for user · Hazard identification number (Kemler code):	Warning: Gases. -
	not classified
EMS Number:	F-D,S-U SWL Protostad from sources of heat
Stowage Code	SW1 Protected from sources of heat. SW22 For AEROSOLS with a maximum capacity of
	litre: Category B. For WASTE AEROSOLS: Category
	C, Clear of living quarters.
Segregation Code	SG69 For AEROSOLS with a maximum capacity of litre:
	Segregation as for class 9. Stow "separated from" class
	except for division 1.4.
	<i>For AEROSOLS with a capacity above 1 litre:</i>
	Segregation as for the appropriate subdivision of class 2 For WASTE AEROSOLS:
	Segregation as for the appropriate subdivision of class 2

Printing date 15.11.2022

Version number 1

Revision: 15.11.2022

Trade name: Aerosol diverse Farbtoene NC Spezial

	(Contd. of p	age
· 14.7 Maritime transport in bulk according	g to IMO	
instruments	Not applicable.	
Transport/Additional information:		
ADR		
Limited quantities (LQ)	1L	
Excepted quantities $(\widetilde{E}Q)$	Code: E0	
• • • • •	Not permitted as Excepted Quantity	
Transport category	2 $2$ $2$ $2$	
Tunnel restriction code	D	
IMDG		
Limited quantities (LQ)	1L	
Excepted quantities $(\widetilde{E}Q)$	Code: E0	
	Not permitted as Excepted Quantity	
UN "Model Regulation":	UN 1950 AEROSOLS, 2.1	

## **SECTION 15: Regulatory information**

- 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture VOC: <840g/l
- · Directive 2012/18/EU
- · Named dangerous substances ANNEX I None of the ingredients is listed.
- · Seveso category P3a FLAMMABLE AEROSOLS
- $\cdot$  Qualifying quantity (tonnes) for the application of lower-tier requirements 150 t
- $\cdot$  Qualifying quantity (tonnes) for the application of upper-tier requirements 500 t

· National regulations:

· Technical instructions (air):

Class Share in % NK 50-100

• Waterhazard class: Water hazard class 1 (Self-assessment): slightly hazardous for water.

• 15.2 Chemical safety assessment: A Chemical Safety Assessment has not been carried out.

### **SECTION 16: Other information**

This information is based on our present knowledge. However, this shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.

### · Relevant phrases

- H201 Explosive; mass explosion hazard.
- H220 Extremely flammable gas.
- H225 Highly flammable liquid and vapour.
- H226 Flammable liquid and vapour.
- H280 Contains gas under pressure; may explode if heated.
- H304 May be fatal if swallowed and enters airways.
- H312 Harmful in contact with skin.
- H315 Causes skin irritation.
- H318 Causes serious eye damage.
- H319 Causes serious eye irritation.
- H332 Harmful if inhaled.
- H335 May cause respiratory irritation.

(Contd. on page 10)

GB

Printing date 15.11.2022

Version number 1

Revision: 15.11.2022

## Trade name: Aerosol diverse Farbtoene NC Spezial

(Contd. of page 9)
H336 May cause drowsiness or dizziness.
H361 Suspected of damaging fertility or the unborn child.
H373 May cause damage to organs through prolonged or repeated exposure.
EUH018 In use may form flammable/explosive vapour-air mixture.
EUH066 Repeated exposure may cause skin dryness or cracking.
· Department issuing SDS: Product safety department
· Abbreviations and acronyms:
RID: Règlement international concernant le transport des marchandises dangereuses par chemin de fer (Regulations Concerning the International Transport of Dangerous Goods by Rail) ICAO: International Civil Aviation Organisation
ADR: Accord relatif au transport international des marchandises dangereuses par route (European Agreement Concerning the
International Carriage of Dangerous Goods by Road)
IMDG: International Maritime Code for Dangerous Goods
IATA: International Air Transport Association
GHS: Globally Harmonised System of Classification and Labelling of Chemicals
EINECS: European Inventory of Existing Commercial Chemical Substances
ELINCS: European List of Notified Chemical Substances
CAS: Chemical Abstracts Service (division of the American Chemical Society)
PBT: Persistent, Bioaccumulative and Toxic
vPvB: very Persistent and very Bioaccumulative
Expl. 1.1: Explosives – Division 1.1
Flam. Gas 1A: Flammable gases – Category 1A
Aerosol 1: Aerosols – Category 1 : Aerosols – Category 3
. Aerosols – Calegory 5 Press. Gas (Comp.): Gases under pressure – Compressed gas
Flam. Liq. 2: Flammable liquids – Category 2
Flam. Liq. 3: Flammable liquids – Category 3
Acute Tox. 4: Acute toxicity – Category 4
Skin Irrit. 2: Skin corrosion/irritation – Category 2
Eye Dam. 1: Serious eye damage/eye irritation – Category 1
Eye Irrit. 2: Serious eye damage/eye irritation – Category 2
Repr. 2: Reproductive toxicity – Category 2
STOT SE 3: Specific target organ toxicity (single exposure) – Category 3
STOT RE 2: Specific target organ toxicity (repeated exposure) – Category 2
Asp. Tox. 1: Aspiration hazard – Category 1
$\cdot$ * Data compared to the previous version altered.